

Technical Data Sheet

CODE 11102

MG 120/5" LL

In-line axial fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	0,56
Insulation class	II ^o	Max airflow (l/s)	44,4
IP	X4	Max airflow (m ³ /h)	160
Max absorbed current (A)	0,12	Max pressure (mmH ₂ O)	4,5
Max absorbed power (W)	20	Max pressure (Pa)	44
Max ambient temperature for continuous operation (°C)	50	RPM	2250
Voltage (V)	220-240	Sound pressure Lp [dB (A)] at 3 m	43

DIMENSIONS

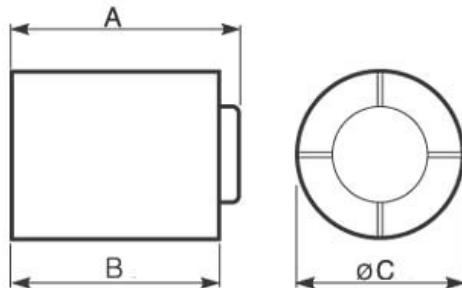

Size A (mm)	Ø 119
Size B (mm)	103
Size C (mm)	100

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11102

MG 120/5" LL

In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 160 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)

Code 12966



SCNRB
SCAT.COM.NON
REV.INCASSO

Code 12971



STAFFA PER
SOTTOTETTO/SOFFITTO
D.120

Code 22260

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com