

Technical Data Sheet

CODE 15079

TORRETTA TRT 210 E 6P

Centrifugal roof fans with horizontal discharge




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of poles	6
Insulation class	I°	Voltage (V)	400
Max absorbed current (A)	6,40	Weight (Kg)	180
Max absorbed power (W)	3400	Max airflow (l/s)	5000
Max ambient temperature for continuous operation (°C)	70	Max airflow (m³/h)	18000
Motor ATEX marking	55	Max pressure (mmH2O)	79
Nominal diameter (mm)	550	Max pressure (Pa)	775
Number of phases (Ph)	3	RPM	980
		Sound pressure Lp [dB (A)] at 3 m	84

DIMENSIONS

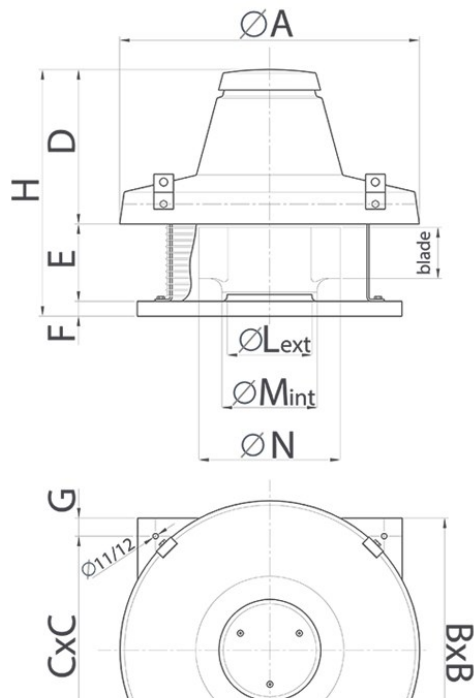

Size A (mm)	1165
Size B (mm)	980
Size C (mm)	900
Size D (mm)	605
Size E (mm)	383
Size F (mm)	38
Size G (mm)	40
Size H (mm)	1026
Size L (mm)	Ø
	520
Size M (mm)	Ø
	529
Size N (mm)	Ø
	805

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 15079

TORRETTA TRT 210 E 6P


Centrifugal roof fans with horizontal discharge



DESCRIPTION

- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved steel blades, hot-dip galvanized and dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed three phase AC motor, insulation class H, with shaft turning in double shielded ball bearings.
- Maximum airflow: 18000 m³/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.


ACCESSORIES



TR-G
100/150/180/210
6-8P(GRIGLI
APROT.)
Code 22507



TR-B
100/150/180/210
6-8P (BOCC.
ASPIR.)
Code 22509



TR-CU
100/150/180/210
6-
8P(CONTROT.BASE)
Code 22540



IRET INVERTER
8 M
Code 12821

PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com