

Technical Data Sheet

CODE 15085

TORRETTA TRT 100 ED 8P

Centrifugal roof fans with horizontal discharge for hot fumes extraction



Certifications

CE CE


TUV TUV

EAC EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	124
Insulation class	1°	Airflow at 1st speed (l/s)	2278
Max absorbed current at Max speed (A)	2,00	Airflow at 1st speed (m³/h)	8200
Max absorbed current at Min speed (A)	1,20	Max airflow at Max speed (l/s)	2556
Max absorbed power at Max speed (W)	860	Max airflow at Max speed (m³/h)	9200
Max ambient temperature for continuous operation (°C)	90	Max pressure at Max speed (mmH2O)	34
Motor ATEX marking	55	Max pressure at Max speed (Pa)	334
Nominal diameter (mm)	450	Max RPM	715
Number of phases (Ph)	3	Min RPM	570
Number of poles	8	Pressure at 1st speed (mmH2O)	28
Power absorbed at 1st speed (W)	600	Pressure at 1st speed (Pa)	275
Voltage (V)	380-415	Sound pressure Lp [dB (A)] at 3 m	71

DIMENSIONS

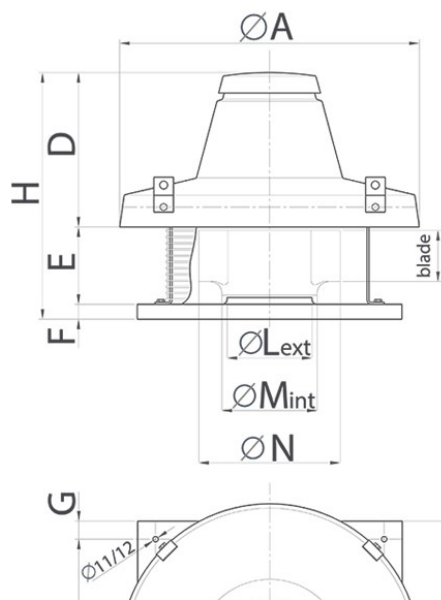

Size A (mm)	1165
Size B (mm)	980
Size C (mm)	900
Size D (mm)	605
Size E (mm)	383
Size F (mm)	38
Size G (mm)	40
Size H (mm)	1026
Size L (mm)	465
Size M (mm)	472
Size N (mm)	715

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
 After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
 Sales Dept:
sales@vortice.ltd.uk
 Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
 After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 15085

TORRETTA TRT 100 ED 8P


Centrifugal roof fans with horizontal discharge for hot fumes extraction



DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), made of electrolytically galvanized pressed steel.
- Dahlander 2 speed three-phase AC motor with shaft turning in ball bearings, size to UNEL MEC standard, flange B5, self-ventilating. Motor insulation class H, with metal cooling fan and cable gland.
- Minimum air flow 8200 m³/h
Maximum air flow: 9200 m³/h.
- Equipped with a motor start capacitor that must be installed remotely from the fan so that it cannot be damaged through direct exposure to heat.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.


CURVES

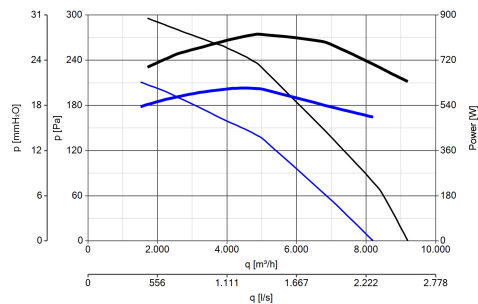


ACCESSORIES



IRT 35
Code 12924



TR-G
100/150/180/210
6-8P(GRIGLI
APROT.)
Code 22507



TR-CU
100/150/180/210
6-
8P(CONTROT.BASE)
Code 22540



PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

VELOCITA'

TRIF.)

Code 22910


Code 22010

Code 2110




GV2 ME07

Code 21436



**TR-G 70/100
(GRIGLIA DI
PROTEZIONE)**

Code 22506



**TR-CU 70/100
(CONTROTELAIO
DI BASE U)**

Code 22539