

Technical Data Sheet

CODE 16035

CA 200 VO Q

In-line centrifugal fans in self-extinguishing plastic



Certifications



IMQ

IMQ Performance

C Tick Mark

EAC

UKCA

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Max airflow at Min speed at 60 Hz (m ³ /h)	395
Insulation class	II°	Max pressure at 60 Hz (mmH2O)	46
IP	44	Max pressure at Max speed (mmH2O)	47,6
Max absorbed current at maMinx speed at 60 Hz (A)	0,40	Max pressure at Max speed (Pa)	467
Max absorbed current at Max speed (A)	0,44	Max pressure at Max speed at 60Hz (Pa)	451
Max absorbed current at Max speed at 60 Hz (A)	0,50	Max pressure at Mid speed (mmH2O)	47,1
Max absorbed current at Mid speed (A)	0,40	Max pressure at Mid speed (Pa)	462
Max absorbed current at Mid speed at 60 Hz (A)	0,46	Max pressure at Mid speed at 60Hz (mmH2O)	39
Max absorbed current at Min speed (A)	0,35	Max pressure at Mid speed at 60Hz (Pa)	383
Max absorbed power at Max speed (W)	80	Max pressure at Min speed at 60Hz (mmH2O)	25,5
Max absorbed power at Max speed at 60 Hz (W)	90	Max pressure at Min speed at 60Hz (Pa)	250
Max absorbed power at Mid speed (W)	57	Max RPM	2175
Max absorbed power at Mid speed at 60 Hz (W)	70	Max speed at 60 Hz (Rpm)	1970
Max absorbed power at Min speed at 60 Hz (W)	50	Mid speed at 60 Hz (Rpm)	1565
Max ambient temperature for continuous operation (°C)	50	Min RPM	1150
Nominal diameter (mm)	200	Min speed at 60 Hz (Rpm)	1255
Ø Discharge hole (mm)	195	Potenza sonora at supply side at Min speed LWA [dB (A)]	69,6
Power absorbed at 1st speed (W)	38	Pressure at 1st speed (mmH2O)	30,3
Voltage (V)	220-240	Pressure at 1st speed (Pa)	297
Weight (Kg)	3,1	RPM at Mid speed	1590
Airflow at 1st speed (l/s)	100	Sound power at extract side at Max speed LWA [dB (A)]	84,2
Airflow at 1st speed (m ³ /h)	360	Sound power at extract side at Mid speed LWA [dB (A)]	76,7
Breakout sound power at Max speed at 60 Hz LWA [dB (A)]	56,6	Sound power at extract side at Min speed LWA [dB (A)]	70,3
Breakout sound power at Mid speed at 60 Hz LWA [dB (A)]	51,4	Sound power at supply side at Max speed LWA [dB (A)]	83,3
Breakout sound power at Min speed at 60 Hz LWA [dB (A)]	47,3	Sound power at supply side at Mid speed LWA [dB (A)]	59
Breakout sound power LWA at Max speed [dB (A)]	58,7	Sound powerat at extraction side at Max speed at 60 Hz LWA [dB (A)]	82,8
Breakout sound power LWA at Mid speed [dB (A)]	51,4	Sound powerat at extraction side at Mid speed at 60 Hz LWA [dB (A)]	77
Breakout sound power LWA at Min speed [dB (A)]	47,3		
PER INFORMAZIONI / FOR INFORMATION			72,4
			81
			76,5
			70,7
			65,2

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 16035

CA 200 V0 Q


In-line centrifugal fans in self-extinguishing plastic



DESCRIPTION

- Material: self-extinguishing PP thermoplastic resin, rated V0.
- Nominal diameter 200 mm.
- 3 speed fan consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

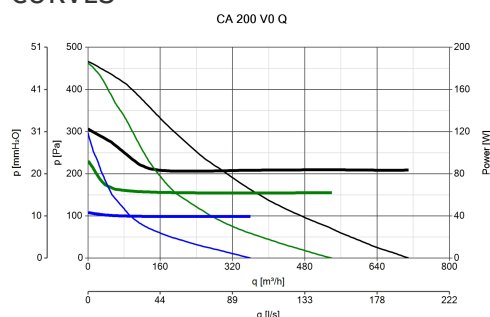

ACCESSORIES



KIT SCB (TRASF.E.C.)

Code 22481



CA-MU (STAFFE DI SOSTEGNO)

Code 22674



CA-FU 200 (FASCETTE)

Code 22671



CA-G 200 (GRIGLIA DI PROTEZIONE)

Code 22765



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

C PIR
Code 12998

C TIMER
Code 12999

TRIO D
Code 12866

TRIO-LINEO
503
Code 12891