

Technical Data Sheet

CODE 16252

CA IL 150 Q

Compact flat in-line centrifugal fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of speeds	3
Insulation class	I°	Voltage (V)	230
Max ambient temperature for continuous operation (°C)	40	Weight (Kg)	5,8
Motor ATEX marking	44	Breakout sound power LWA [dB(A)]	53
Motor class	B	Max airflow (l/s)	97,2
Nominal current at Max speed (A)	0,23	Max airflow (m³/h)	350
Nominal current at Min speed (A)	0,16	Max pressure (mmH2O)	30,6
Nominal diameter (mm)	150	Max pressure (Pa)	300
Nominal power at Max speed (W)	50	Sound power at exhaust inlet LWA [dB(A)]	60
Nominal power at Min speed (W)	18	Sound power at supply outlet LWA [dB(A)]	65

DIMENSIONS

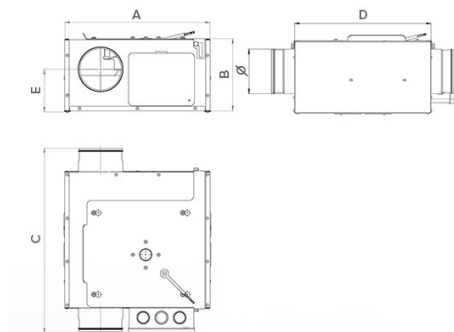

Ø (mm)	150
Size A (mm)	342
Size B (mm)	198
Size C (mm)	412
Size D (mm)	307
Size E (mm)	103

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 16252

CA IL 150 Q

Compact flat in-line centrifugal fans




DESCRIPTION

- Casing and motor-support made of galvanized sheet steel; lined internally with PE sound-proof panel (thickness 10 mm).
- Circular spigots for connection to standard tubes, equipped with double lip rubber seal for perfect air tightness.
- Nominal diameter: 150 mm.
- External rotor AC motorfan, with shaft turning in ball bearings, coupled to a backward curved centrifugal impeller.
- Galvanized steel sheet brackets, directly coupled to casing.
- Electric connection box accommodating capacitors, molded with shock-proof plastic resin resistant against aggressive agents, integrating cable

cages and cable glands to ensure high protection (IP55) against dust and water.

- 3 alternative installation: wall, ceiling and false-ceiling.
- Easy maintenance: motor is directly fixed to the cover, in turn hinged to the casing, allowing easy external rotation and motorfan direct access.
- Protection against dust and water: IP44.
- Electric insulation class: I (grounding is required).

CURVES

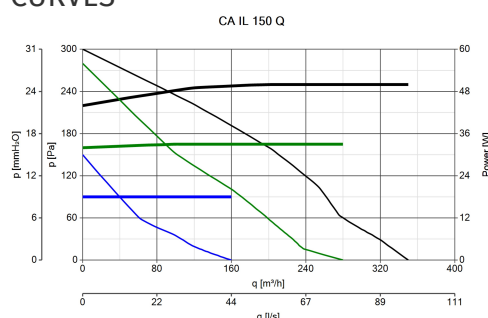

ACCESSORIES



C 1.5 (COMANDO EL. 1.5 A)

Code 12966



GR 150

Code 21179



FS 150

Code 21184



TRIO D

Code 12866



IREM D

Code 12867

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com