

Technical Data Sheet

CODE 17164

LINEO 200 QUIET

Sound-proof mixed flow extractor fans



Certifications



IMQ



CE



IMQ Performance



UKCA

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Max airflow at Mid speed at 60 Hz (m ³ /h)	920
Insulation class	II°	Max airflow at Min speed (l/s)	290,3
IP	X5	Max airflow at Min speed at 60 Hz (l/s)	188,9
Max absorbed current at maMinx speed at 60 Hz (A)	0,35	Max airflow at Min speed at 60 Hz (m ³ /h)	680
Max absorbed current at Max speed (A)	0,49	Max pressure at 60 Hz (mmH2O)	37,5
Max absorbed current at Max speed at 60 Hz (A)	0,70	Max pressure at Max speed (mmH2O)	29
Max absorbed current at Mid speed (A)	0,42	Max pressure at Max speed (Pa)	284,4
Max absorbed current at Mid speed at 60 Hz (A)	0,50	Max pressure at Max speed at 60Hz (Pa)	367,8
Max absorbed current at Min speed (A)	0,34	Max pressure at Mid speed (mmH2O)	26,3
Max absorbed power at Max speed (W)	110	Max pressure at Mid speed (Pa)	257,9
Max absorbed power at Max speed at 60 Hz (W)	155	Max pressure at Mid speed at 60Hz (mmH2O)	26,9
Max absorbed power at Mid speed (W)	95	Max pressure at Mid speed at 60Hz (Pa)	263,8
Max absorbed power at Mid speed at 60 Hz (W)	115	Max pressure at Min speed at 60Hz (mmH2O)	15,6
Max absorbed power at Min speed at 60 Hz (W)	85	Max pressure at Min speed at 60Hz (Pa)	153
Max ambient temperature for continuous operation (°C)	50	Max RPM	2690
Max continuous operation room temperature at 60 Hz (°C)	50	Max speed at 60 Hz (Rpm)	2795
Nominal diameter (mm)	200	Mid speed at 60 Hz (Rpm)	2130
Power absorbed at 1st speed (W)	80	Min RPM	1880
Voltage (V)	220-240	Min speed at 60 Hz (Rpm)	1580
Weight (Kg)	8,6	Potenza sonora at supply side at Min speed LWA [dB (A)]	56,2
Airflow at 1st speed (l/s)	223,6	Pressure at 1st speed (mmH2O)	20,6
Airflow at 1st speed (m ³ /h)	805	Pressure at 1st speed (Pa)	202
Breakout sound power LWA at Max speed [dB (A)]	56	RPM at Mid speed	2380
Breakout sound power LWA at Mid speed [dB (A)]	53,4	Sound power at extract side at Max speed LWA [dB (A)]	65,5
Breakout sound power LWA at Min speed [dB (A)]	48	Sound power at extract side at Mid speed LWA [dB (A)]	62,8
Breakout sound pressure at 3m at Max speed Lp [dB (A)]	35,5	Sound power at extract side at Min speed LWA [dB (A)]	57,2
Breakout sound pressure at 3m at Mid speed Lp [dB (A)]	32,9	Sound power at supply side at Max speed LWA [dB (A)]	64,8
		Sound power at supply side at Mid speed LWA [dB (A)]	62
		Sound pressure at extract side at 3m at Max speed Lp [dB (A)]	48
			45,3
			39,7
			47,3
			44,5
			38,7

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 17164

LINEO 200 QUIET


Sound-proof mixed flow extractor fans



DESCRIPTION

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Casing integrating a sound-absorbing coating, optimized to minimize sound emissions radiated into the environment and transmitted through exhaust and supply ducts.
- Nominal diameter 200 mm.
- Induction motor, thermally protected, with shaft mounted on ball bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Speed adjustable through Vortice speed devices.

CURVES

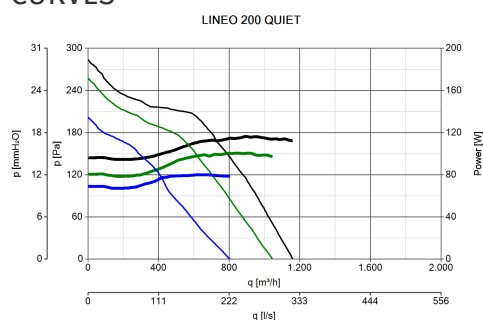

ACCESSORIES



C TEMP

Code 12992



C SMOKE

Code 12993




C HCS

Code 12994



C PIR

Code 12998



C TIMER

Code 12999



TRIO-LINEO 503

Code 12891



C 1.5 (COMANDO EL. 1.5 A)

Code 12966

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

(COMANDO 5V

0.5 A)

Code 12987

(TRASF.E.C.)

Code 22481

(TRASF.5 V.)

Code 22483