

Technical Data Sheet

CODE 17174

LINEO 200 QUIET ES

Sound-proof energy saving mixed flow extractor fans



Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Max airflow at 8V (l/s)	262,5
Insulation class	II°	Max airflow at 8V (m³/h)	945
IP	45	Max pressure at 10V (Pa)	329,5
Max absorbed current at 10V (A)	0,78	Max pressure at 4V (Pa)	84,3
Max absorbed current at 4V (A)	0,18	Max pressure at 6V (Pa)	136,3
Max absorbed current at 6V (A)	0,27	Max pressure at 10V (mmH2O)	33,6
Max absorbed current at 8V (A)	0,52	Max pressure at 4V (mmH2O)	8,6
Max absorbed power at 10V (W)	88	Max pressure at 6V (mmH2O)	13,9
Max absorbed power at 4V (W)	15,2	Max pressure at 8V (mmH2O)	22,9
Max absorbed power at 6V (W)	25,3	Max pressure at 8V (Pa)	224,6
Max absorbed power at 8V (W)	52,4	RPM at 10V	2700
Max ambient temperature for continuous operation (°C)	50	RPM at 4V	1380
Nominal diameter (mm)	200	RPM at 6V	1705
Voltage (V)	220-240	RPM at 8V	2245
Weight (Kg)	8,6	Sound power at extract side at 10V speed LWA [dB (A)]	65,5
Breakout sound power at 10V Lw [dB (A)]	56,3	Sound power at extract side at 4V speed LWA [dB (A)]	48,7
Breakout sound power at 4V Lw [dB (A)]	40,2	Sound power at extract side at 6V speed LWA [dB (A)]	54,3
Breakout sound power at 6V Lw [dB (A)]	45,3	Sound power at extract side at 8V speed LWA [dB (A)]	60,8
Breakout sound power at 8V Lw [dB (A)]	51,4	Sound power at supply side at 10V speed LWA [dB (A)]	65,2
Breakout sound pressure at 3m at 10V Lp [dB (A)]	35,8	Sound power at supply side at 4V speed LWA [dB (A)]	48,1
Breakout sound pressure at 3m at 4V Lp [dB (A)]	19,7	Sound power at supply side at 6V speed LWA [dB (A)]	53,6
Breakout sound pressure at 3m at 6V Lp [dB (A)]	24,8	Sound power at supply side at 8V speed LWA [dB (A)]	60,4
Breakout sound pressure at 3m at 8V Lp [dB (A)]	30,9	Sound pressure at extract side at 3m at 10V Lp [dB (A)]	48
Max airflow at 10V (l/s)	318,1	Sound pressure at extract side at 3m at 4V Lp [dB (A)]	31,2
Max airflow at 10V (m³/h)	1145	Sound pressure at extract side at 3m at 6V Lp [dB (A)]	36,8
Max airflow at 4V (l/s)	158,3	Sound pressure at extract side at 3m at 8V Lp [dB (A)]	43,3
Max airflow at 4V (m³/h)	570	Sound pressure at supply side at 3m at 10V Lp [dB (A)]	47,7
Max airflow at 6V (l/s)	200	Sound pressure at supply side at 3m at 4V Lp [dB (A)]	30,6
Max airflow at 6V (m³/h)	720		
			36,1
			42,9
			—

PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:

OTHER COUNTRIES
Sales Dept:

prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 17174

LINEO 200 QUIET ES


Sound-proof energy saving mixed flow
extractor fans



DESCRIPTION

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Casing integrating a sound-absorbing coating, optimized to minimize sound emissions radiated into the environment and transmitted through exhaust and supply ducts.
- Nominal diameter 200 mm.
- EC (brushless) motor, thermally protected, with shaft mounted on ball bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Equipped with a thermal fuse overheating safety device.
- Speed adjustable through potentiometer (0-10V signal) or two-speed switch (to be set at the installation in a preset range).

CURVES

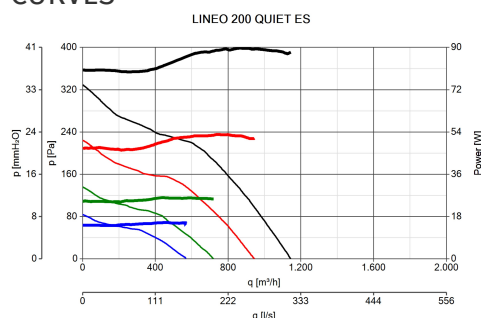

ACCESSORIES



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998



C TIMER

Code 12999



POT-IT

Code 12826



POT

Code 12828

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com