

# Technical Data Sheet

CODE 17178

## LINEO 125 ES

Energy saving mixed flow extractor fans



### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Max airflow at 8V (l/s)	87,5
Insulation class	II°	Max airflow at 8V (m³/h)	315
IP	45	Max pressure at 10V (Pa)	296,2
Max absorbed current at 10V (A)	0,25	Max pressure at 4V (Pa)	37,3
Max absorbed current at 4V (A)	0,07	Max pressure at 6V (Pa)	63,7
Max absorbed current at 6V (A)	0,10	Max pressure at 10V (mmH2O)	30,2
Max absorbed current at 8V (A)	0,17	Max pressure at 4V (mmH2O)	3,8
Max absorbed power at 10V (W)	25	Max pressure at 6V (mmH2O)	6,5
Max absorbed power at 4V (W)	7	Max pressure at 8V (mmH2O)	11,8
Max absorbed power at 6V (W)	10	Max pressure at 8V (Pa)	115,7
Max absorbed power at 8V (W)	18	RPM at 10V	2270
Max ambient temperature for continuous operation (°C)	60	RPM at 4V	1090
Nominal diameter (mm)	125	RPM at 6V	1395
Voltage (V)	220-240	RPM at 8V	1940
Weight (Kg)	2,2	Sound power at extract side at 10V speed LWA [dB (A)]	81,4
Breakout sound power at 10V Lw [dB (A)]	52,2	Sound power at extract side at 4V speed LWA [dB (A)]	64,1
Breakout sound power at 4V Lw [dB (A)]	36,8	Sound power at extract side at 6V speed LWA [dB (A)]	68,2
Breakout sound power at 6V Lw [dB (A)]	40,5	Sound power at extract side at 8V speed LWA [dB (A)]	76,7
Breakout sound power at 8V Lw [dB (A)]	48,8	Sound power at supply side at 10V speed LWA [dB (A)]	81,5
Breakout sound pressure at 3m at 10V Lp [dB (A)]	31,6	Sound power at supply side at 4V speed LWA [dB (A)]	63,6
Breakout sound pressure at 3m at 4V Lp [dB (A)]	16,2	Sound power at supply side at 6V speed LWA [dB (A)]	68,6
Breakout sound pressure at 3m at 6V Lp [dB (A)]	20	Sound power at supply side at 8V speed LWA [dB (A)]	77,5
Breakout sound pressure at 3m at 8V Lp [dB (A)]	28,3	Sound pressure at extract side at 3m at 10V Lp [dB (A)]	63,9
Max airflow at 10V (l/s)	102,8	Sound pressure at extract side at 3m at 4V Lp [dB (A)]	46,6
Max airflow at 10V (m³/h)	370	Sound pressure at extract side at 3m at 6V Lp [dB (A)]	50,6
Max airflow at 4V (l/s)	47,2	Sound pressure at extract side at 3m at 8V Lp [dB (A)]	59,1
Max airflow at 4V (m³/h)	170	Sound pressure at supply side at 3m at 10V Lp [dB (A)]	64
Max airflow at 6V (l/s)	61,1		
Max airflow at 6V (m³/h)	220		
			46
			51,1
			60

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

# Technical Data Sheet

CODE 17178

## LINEO 125 ES


Energy saving mixed flow extractor fans



### DESCRIPTION

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Nominal diameter 125 mm.
- EC (brushless) motor, thermally protected, with shaft mounted on ball bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Equipped with a thermal fuse overheating safety device.
- Speed adjustable through potentiometer (0-10V signal) or two-speed switch (to be set at the installation in a preset range).

### CURVES

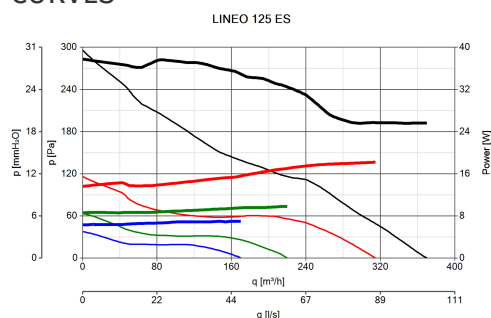

### ACCESSORIES



**POT-IT**  
Code 12826



**POT**  
Code 12828



**C TEMP**  
Code 12992



**C SMOKE**  
Code 12993



**C HCS**  
Code 12994



**C PIR**  
Code 12998



**C TIMER**  
Code 12999



### PER INFORMAZIONI / FOR INFORMATION

ITALY  
Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF  
IRELAND  
Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

OTHER COUNTRIES  
Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com