

# Technical Data Sheet

CODE 19226

## OPTIMAL DRY

Automatic and manual hand dryers



### Certifications



IMQ



CE



C Tick Mark



CCC




EAC

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Weight (Kg)	2,6
Insulation class	II°	Air speed (km/h)	50
IP	X4	Drying time (s)	25
Max absorbed current (A)	9	Max airflow (l/s)	47
Max absorbed power (W)	2000	Max airflow (m <sup>3</sup> /h)	220
Motor power (W)	65	Max flow speed (m/s)	14
Shock resistance (IK)	09	Power in stand-by mode (W)	0,4060
Voltage (V)	220-240	Sound pressure level at 1m Lp [dB (A)]	61,4

### DIMENSIONS

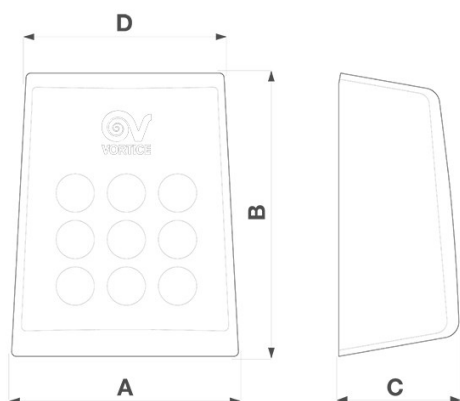

Size A (mm)	253
Size B (mm)	319
Size C (mm)	137
Size D (mm)	220

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)

# Technical Data Sheet

CODE 19226

## OPTIMAL DRY

Automatic and manual hand dryers



### DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 170 m<sup>3</sup>/h.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range 20"-60". Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- Dust filter.
- IMQ safety certification.

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF IRELAND

Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com