

# Technical Data Sheet

CODE 19227

## OPTIMAL DRY R A

Automatic and manual hand dryers




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Weight (Kg)	3,2
Insulation class	II°	Air speed (km/h)	50
IP	X4	Drying time (s)	25
Max absorbed current (A)	9	Max airflow (l/s)	47
Max absorbed power (W)	2000	Max airflow (m <sup>3</sup> /h)	220
Motor power (W)	65	Max flow speed (m/s)	14
Shock resistance (IK)	09	Power in stand-by mode (W)	0,4550
Voltage (V)	220-240	Sound pressure level at 1m Lp [dB (A)]	61,4

### DIMENSIONS

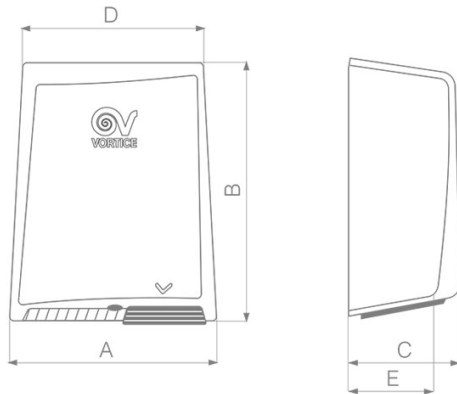

Size A (mm)	253
Size B (mm)	320
Size C (mm)	130
Size D (mm)	220
Size E (mm)	115

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)

# Technical Data Sheet

CODE 19227

## OPTIMAL DRY R A

Automatic and manual hand dryers



### DESCRIPTION

- Front cover moulded in thermosetting impact-resistant plastic, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 170 m<sup>3</sup>/h.
- Dryer operated automatically by an infrared device with activation distance of up to 35 cm, selected by means of an internal trimmer adjustable at the moment of installation. Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- Dust filter.
- IMQ safety certification.

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF IRELAND

Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com