

Technical Data Sheet

CODE 19236

ECODRY




Certifications

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Air speed (km/h)	370
Insulation class	I°	Air speed (m/s)	103
IP	X4	Drying time (s)	12-14
Max absorbed power (W)	800	Max airflow (l/s)	25
Voltage (V)	220-240	Max airflow (m³/h)	90
Weight (Kg)	2,5	Power in stand-by mode (W)	0,5
		Sound pressure level at 1m Lp [dB (A)]	70

DIMENSIONS

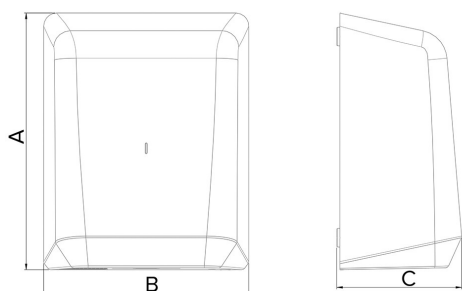

Size A (mm)	294
Size B (mm)	234
Size C (mm)	143

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 19236

ECODRY



DESCRIPTION

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com