

Technical Data Sheet


CODE 19230

METAL DRY ULTRA A

Automatic and manual hand dryers




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Power max (W)	1950	Voltage (V)	220-240
Frequency (Hz)	50/60	Weight (Kg)	7
Insulation Class	II°	Delivery max (l/s)	53
IP	X4	Delivery max (m ³ /h)	190
Motor Power (W)	140	Power in stand-by mode (W)	0,2796
Shock resistance rating (IK)	10	Sound pressure level Lp [dB (A)] 1m	69,8

DIMENSIONS

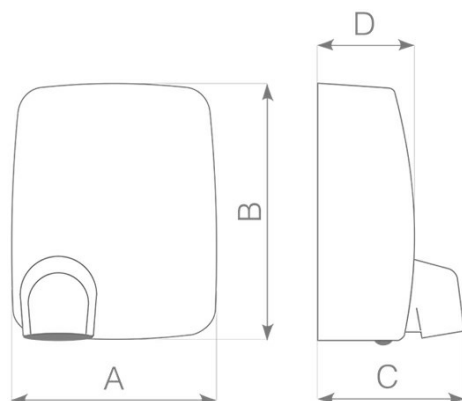

Etichetta Energetica	N0
Size A (mm)	280
Size B (mm)	355
Size C (mm)	202
Size D (mm)	139

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19230

METAL DRY ULTRA A

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of pressure diecast aluminium with brushed finish, closure with vandal-proof screws.
- Plastic wall mounting flange (talc-filled PP).
- Nozzle rotatable through 360°, grille with scratch-resistant powder-coated finish, transparent protection.
- Scroll and motor mounting cowl moulded from ABS
- AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 190 m3/h.
- Dryer operated automatically by an infrared device with activation distance of up to 35 cm, selected by means of an internal trimmer adjustable at the moment of installation. Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com