

## SPECIFICATION DETAILS

The 204x60mm Rectangular Single Airbrick is manufactured from (white) High Impact Polypropylene and has a minimum free area of 7,680mm<sup>2</sup>. It has a female adaptor for connection outside of the System 204 duct.

The Single Airbrick is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

Single Airbrick is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.


**Box quantity:** 20

**Individual Weight:** 115g

**MAX/MIN OPERATING TEMPERATURES** + 60°C to - 15°C

**Colour:** White, Brown, Beige, Terracotta & Grey

## PERFORMANCE CURVE

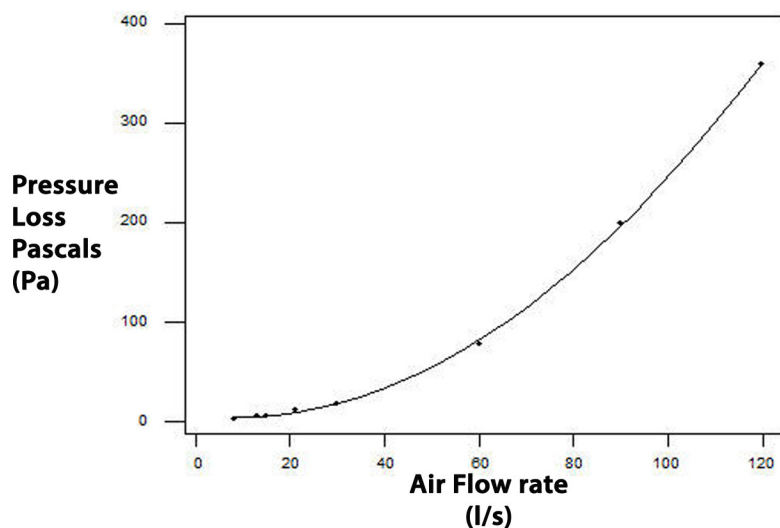

## AIRFLOW

## RESISTANCE

8 l/s	2.00 pa
13 l/s	5.50 pa
21 l/s	11.00 pa
30 l/s	18.40 pa
60 l/s	71.90 pa
120 l/s	335.00 pa