



SPECIFICATION DETAILS

The 46698 204x60mm 1m Rectangular Hi-Flow Attenuator is manufactured from UPVC which is lined with acoustic material and has a minimum free area of 11,664mm². It has a female adaptor for connection outside of the System 204 duct.

The 46698 is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

46698 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and will meet UL94HB flammability standard.

MAX/MIN OPERATING TEMPERATURES


+ 60°C to - 15°C

Box quantity: 5

Individual Weight: 1405g

Colour: White

PERFORMANCE CURVE

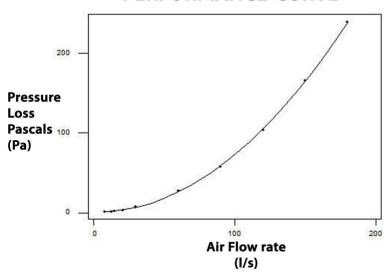

AIRFLOW	RESISTANCE
8 l/s	1.00 pa
13 l/s	1.60 pa
21 l/s	4.20 pa
30 l/s	8.00 pa
60 l/s	27.80 pa
120 l/s	104.00 pa