

Technical Data Sheet

CODE 16018

CA 125 VO D

In-line centrifugal fans in self-extinguishing plastic



Certifications



IMQ

IMQ Performance

C Tick Mark

EAC

UKCA

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Max airflow at Min speed at 60 Hz (m ³ /h)	120
Insulation class	II°	Max pressure at 60 Hz (mmH2O)	41,5
IP	X4	Max pressure at Max speed (mmH2O)	34,8
Max absorbed current at maMinx speed at 60 Hz (A)	0,17	Max pressure at Max speed (Pa)	341
Max absorbed current at Max speed (A)	0,22	Max pressure at Max speed at 60Hz (Pa)	407
Max absorbed current at Max speed at 60 Hz (A)	0,26	Max pressure at Mid speed (mmH2O)	33,3
Max absorbed current at Mid speed (A)	0,21	Max pressure at Mid speed (Pa)	327
Max absorbed current at Mid speed at 60 Hz (A)	0,24	Max pressure at Mid speed at 60Hz (mmH2O)	31,7
Max absorbed current at Min speed (A)	0,14	Max pressure at Mid speed at 60Hz (Pa)	311
Max absorbed power at Max speed (W)	43	Max pressure at Min speed at 60Hz (mmH2O)	11,3
Max absorbed power at Max speed at 60 Hz (W)	46	Max pressure at Min speed at 60Hz (Pa)	111
Max absorbed power at Mid speed (W)	30	Max RPM	2220
Max absorbed power at Mid speed at 60 Hz (W)	35	Max speed at 60 Hz (Rpm)	2100
Max absorbed power at Min speed at 60 Hz (W)	16	Mid speed at 60 Hz (Rpm)	1715
Max ambient temperature for continuous operation (°C)	50	Min RPM	890
Nominal diameter (mm)	125	Min speed at 60 Hz (Rpm)	1025
Ø Discharge hole (mm)	122	Potenza sonora at supply side at Min speed LWA [dB (A)]	54,8
Power absorbed at 1st speed (W)	13	Pressure at 1st speed (mmH2O)	10,3
Voltage (V)	220-240	Pressure at 1st speed (Pa)	101
Weight (Kg)	2,3	RPM at Mid speed	1820
Airflow at 1st speed (l/s)	31	Sound power at extract side at Max speed LWA [dB (A)]	82,2
Airflow at 1st speed (m ³ /h)	110	Sound power at extract side at Mid speed LWA [dB (A)]	77,7
Breakout sound power at Max speed at 60 Hz LWA [dB (A)]	54,3	Sound power at extract side at Min speed LWA [dB (A)]	57,8
Breakout sound power at Mid speed at 60 Hz LWA [dB (A)]	48,2	Sound power at supply side at Max speed LWA [dB (A)]	80
Breakout sound power at Min speed at 60 Hz LWA [dB (A)]	34,2	Sound power at supply side at Mid speed LWA [dB (A)]	74,7
Breakout sound power LWA at Max speed [dB (A)]	56,2	Sound powerat at extraction side at Max speed at 60 Hz LWA [dB (A)]	80,4
Breakout sound power LWA at Mid speed [dB (A)]	49,5	Sound powerat at extraction side at Mid speed at 60 Hz LWA [dB (A)]	76,1
PER INFORMAZIONI / FOR INFORMATION			61,2
			78,1
			73,3
			58,4
			62,9

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 16018

CA 125 V0 D


In-line centrifugal fans in self-extinguishing plastic



DESCRIPTION

- Material: self-extinguishing PP thermoplastic resin, rated V0.
- Nominal diameter 125 mm.
- 3 speed fan consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

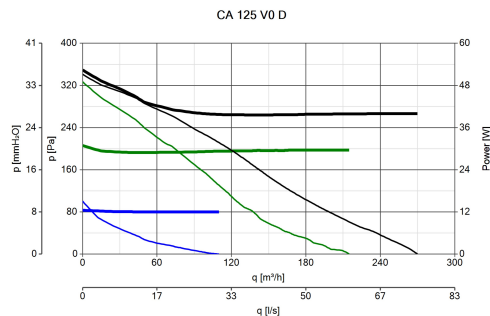

ACCESSORIES




KIT SCB (TRASF.E.C.)

Code 22481



CA-MU (STAFFE DI SOSTEGNO)

Code 22674



CA-G 125 (GRIGLIA DI PROTEZIONE)

Code 22755



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Code 12999

Code 12866

503

Code 12891