

Technical Data Sheet

CODE 19221

METAL DRY

Automatic and manual hand dryers



Certifications



IMQ



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Shock resistance (IK)	10
Insulation class	II°	Voltage (V)	220-240
IP	X4	Weight (Kg)	7,2
Max absorbed current (A)	8,5	Max airflow (l/s)	53
Max absorbed power (W)	1950	Max airflow (m³/h)	190
Motor power (W)	140	Power in stand-by mode (W)	0,4737
		Sound pressure level at 1m Lp [dB (A)]	69,8

DIMENSIONS

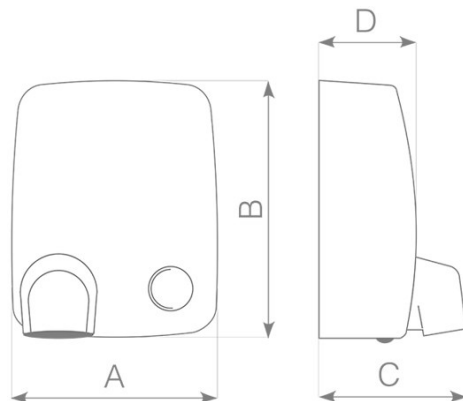

Size A (mm)	280
Size B (mm)	355
Size C (mm)	202
Size D (mm)	139

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 19221

METAL DRY

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of pressure diecast aluminium with scratch-resistant white powder-coated finish, closure with vandal-proof screws.
- Plastic wall mounting flange (talc-filled PP).
- Nozzle rotatable through 360°, grille with scratch-resistant powder-coated finish, transparent protection.
- Scroll and motor mounting cowl moulded from ABS
- AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 190 m³/h.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range 20"-60". Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- IMQ safety certification.

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com